



KEY FEATURES

Model 1320

- Frequency response : 20Hz-1MHz
- 0.001A-20.00A, 150W output capability, maximum 100Adc extendable with 1320S
- Forward / Reverse current switching capability
- Standard GPIB, Handler interface
- Bias current sweep (2-21points), automatic or manual trigger, for core characteristics analysis
- Direct controlled by LCR Meter 3302/3252/11022/11025
- 16x2 LCD text display
- 0.01mΩ-199.99Ω DCR measurement capability
- 50 internal instruments setups for store/recall capability
- Single bias current output timer capability (24 hours)
- Long term continued maximum power output capability
- Excellent protection circuit, keep L Meter from damage as bias current was broken abnormally

ORDERING INFORMATION

- 1310** : Bias Current Source 0-10A
- 1320** : Bias Current Source 0-20A
- 1320-10A** : Bias Current Source 0-10A
- 1320S** : Bias Current Source (Slave)
- A115001** : Foot Switch #10
- A113011** : 4 Terminals Test Cable with Clip



Bias Current Source


Model 1310/1320/1320S/1320-10A

KEY FEATURES

Model 1310

- Frequency response : 20Hz-200kHz
- 0.001A-10.00A, 90W output capability
- Forward / Reverse current switching capability
- Bias current sweep (2-11points), automatic or manual trigger, for core characteristics analysis
- 16x2 LCD text display
- 0.001Ω-199.99Ω DCR measurement capability
- Long term continued maximum power output capability
- Excellent protection circuit, keep L Meter from damage as bias current was broken abnormally

The 1320 Bias Current Source output can be controlled by LCR Meter Model 3302/3252/11022/11025 directly. The 1320S connected externally can output current up to 100A. The bias current scan frequency triggered automatically or manually can analyze the iron core characteristics in inductor for quality inspection and product feature analysis. They are the best measurement instruments combination for inductor test.

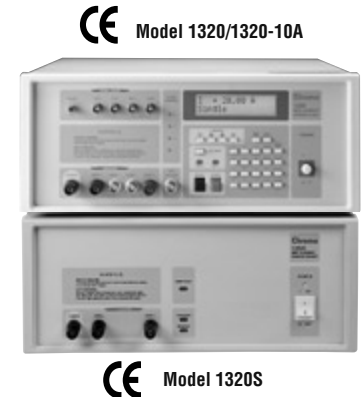

SPECIFICATIONS

Model	1310	1320	1320S	1320-10A
Bias Current Source				
Output Current	0.00-10.00Adc Forward/Reverse	0.00- 20.00Adc Forward/Reverse 100A extendable when linked with 1320S	0.00-20.00Adc(Slave) Forward/Reverse *2	0.00-10.00Adc Forward/Reverse
Accuracy	0.000A-1.000A:1%+3mA 1.01A-10.00A:2%	0.000A-1.000A : 1% +3mA 1.001A-5.00A:2% 5.01A-20.00A:2% 20.1A-20.0(1+X)A:3% *1	3%	0.000A-1.000A:1%+3mA 1.001A-5.00A:2% 5.01A-10.00A:2%
Scan Test	Manual or Auto, 2-11 steps	Manual or Auto, 2-21 steps	---	Manual or Auto, 2-21 steps
Frequency Response	20Hz-200kHz	20Hz-1MHz	20Hz-1MHz	20Hz-1MHz
Maximum Power Continued Output Allowable Time	> 24 hours (below 40°C)			
Timer	---	0-24 hours	---	0-24 hours
Delay time	---	0.0-100.0 sec/step,adjustable	---	0.0-100.0 sec/step, adjustable
DCR Meter Accuracy & Resolution				
DCR Range	20mΩ	---	2% + 0.07mΩ, 0.01mΩ	---
	200mΩ	---	2% + 0.2mΩ, 0.1mΩ	---
	2Ω	3% + 0.002Ω, 0.001Ω	3% + 0.002Ω, 0.001Ω	---
	20Ω	3% + 0.03Ω, 0.01Ω	3% + 0.02Ω, 0.01Ω	---
	200Ω	3% + 0.3Ω, 0.1Ω	3% + 0.2Ω, 0.1Ω	---
DCV Display				
Display Range	---	0.00V-10.00Vdc	---	0.00V-20.00Vdc
Accuracy	---	2% + 0.05Vdc	---	2% + 0.05Vdc
Display	16 x 2 text dot matrix LCD			16 x 2 text dot matrix LCD
General				
Operation Environment	Temperature : 10°C-40°C, Humidity : 10%-90 % RH			
Power Consumption	250VA max.	650VA max.	600VA max.	650VA max
Power Requirements	90Vac-125Vac or 190Vac-250Vac, 48Hz-62Hz			
Dimension (H x W x D)	132 x 410 x 351 mm / 5.2 x 16.14 x 13.82 inch	177 x 430 x 450 mm / 6.97 x 16.93 x 17.72 inch		
Weight	8.8 kg / 19.38 lbs	17.5 kg / 38.55 lbs	15.5 kg / 34.14 lbs	17.5 kg / 38.55 lbs

Note*1 : X is the number of linked 1320S

Note*2 : 1320S is a slave current source of 1320